

REMARKS

Examination of the subject application in light of the present Preliminary Amendment is respectfully requested. Further examination of the subject patent application in light of the present Amendment and Remarks is respectfully requested.

For purposes of clarity only, a substitute specification is enclosed showing the changes, with new text shown as underlined, and deleted text shown as strikeout. No new matter has been added. Also, a version of the substitute specification incorporating all of the changes ("clean copy of specification") is attached after the signature page.


Applicant respectfully requests entry of this preliminary amendment prior to action on the merits, and requests early allowance of all pending claims. Should the Examiner be of the opinion that a telephone conference would expedite prosecution of the subject application, the Examiner is respectfully requested to call the undersigned at the below-listed number.

The Commissioner is hereby authorized to charge any additional fee which may be required for this application under 37 C.F.R. §§ 1.16-1.18, including but not limited to the issue fee, or credit any overpayment, to Deposit Account No. 23-0920. Should no proper amount be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal, or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 23-0920.

Respectfully submitted,

WELSH & KATZ, LTD.

By


Eric D. Cohen
Registration No. 38,110

December 15, 2005

WELSH & KATZ, LTD.
120 South Riverside Plaza
22nd Floor
Chicago, Illinois 60606
(312) 655-1500

10/560849

IAP20 RSCC PCHPTO 15 DEC 2005

**COPY OF SUBSTITUTE SPECIFICATION
SHOWING CHANGES RELATIVE TO PREVIOUS
VERSION OF SPECIFICATION**

~~METHOD FOR MOUNTING ELECTRONIC COMPONENT~~METHOD FOR MOUNTING ELECTRONIC COMPONENT~~Background of the Invention~~ BACKGROUND OF THE INVENTION~~1. Field of the Invention~~ 1. FIELD OF THE INVENTION

[0001]

This invention relates to a method for mounting through an adhesive sheet an electronic component on a ~~printed board~~printed board~~printed circuit board~~ provided with a wiring pattern.

~~Description of Related Art~~ DESCRIPTION OF RELATED ART

[0002]

~~For~~In implementation of a general COF (Chip on Film) mounting method, an anisotropic conductive film 14 is bonded onto a flexible board 13 formed with a wiring patterns 11 corresponding to an electronic component terminals and a solder resist 12 formed in a manner to surround an area to be mounted with electronic component and to ~~coat~~cover the wiring patterns 11, as shown in Fig. 1A, while an electronic component 16 having bumps 15 is positioned and placed on the anisotropic conductive film 14, thereby being subjected to thermocompression bonding as shown in Fig. 1B. An electronic component mounting module such as shown in Fig. 1C is therefore obtained.

[0003]

In the meanwhile, ~~with~~in the COF mounting method as described above, air may remains between the anisotropic conductive film 14 and the flexible board 13 ~~in some cases ascribable to surface level difference among~~due to uneven surface created by the wiring pattern 11, the solder resist 12, and so on as shown in Fig. 1B. When the electronic component 16 is mounted in such a state, ~~the~~such problems may occur ~~such that the air confined~~trapped between the anisotropic conductive film 14 and the flexible board 13 expands due to heat and pressure added at a mounting time, thereby forming a void 17, or at worst, the void bursts to destroy the anisotropic conductive film 14, thereby resulting in exposure of the wiring pattern 18. The void 17 or exposure 18 of the wiring pattern leads to decrease in ~~incredibility~~reliability of the electronic component mounting module.

[0004]

Hence, to prevent such problems as described above, a technology has been proposed in which the ~~confined-trapped~~ air is released to an exterior by forming ~~a hole-holes~~ in a thickness direction of the flexible board (see, e.g., Patent Document Literature 1, Japanese Patent Application Publication Laying-Open No. H05-343,844). According to ~~Patent Document~~ Patent Literature 1, the ventilation holes ~~is-are~~ formed in a thickness direction ~~at-in an unconnected-area of-to be connected to~~ a flexible circuit board when bonding and uniting an inflexible circuit board to the flexible circuit board through the anisotropic conductive film. With the connecting method according to ~~Patent Document~~ Patent Literature 1, therefore, even ~~where-if~~ a bubble (air) remaining at a contact surface between the inflexible circuit board and the flexible circuit board expands due to application of heat, for example, the air bubble diffuses and outgases easily through the ventilation hole ~~at-in the unconnected-area of-to be connected to~~ the flexible circuit board without remaining ~~at-in~~ the above described area.

[0005]

However, the above described method according to ~~Patent Document~~ Patent Literature 1 requires a superfluous process to previously form or process the holes on the flexible board, thereby having such a problem as complicating the mounting operation. Thus, required is development of an art to solve the problem described above with a means different from the method described in ~~Patent Document~~ Patent Literature 1.

~~Disclosure of the Invention~~ DETAILED DESCRIPTION

[0006]

This invention has been proposed ~~against the above described background~~ considering the current condition, and aims to provide a method for mounting an electronic component, with which ~~credibility~~ reliability can be improved without complicating mounting operation.

[0007]

To achieve the above described object, the method for mounting the electronic component according to this invention, with which the electronic component is mounted through an adhesive sheet to a ~~printed board~~ printed board ~~printed circuit board~~

provided with a wiring pattern, is characterized in that the adhesive sheet is bonded to an area on the ~~printed board~~printed board~~printed circuit board~~ to which the electronic component is mounted, in a state where air intervening between the adhesive sheet and the ~~printed board~~printed board~~printed circuit board~~ is heated.

[0008]

With the above described method for mounting the electronic component, the expanded air is ~~confined~~trapped between the adhesive sheet and the ~~printed board~~printed board~~printed circuit board~~ by rendering the air intervene between the adhesive sheet and the ~~printed board~~printed board~~printed circuit board~~ in a process for bonding the adhesive sheet to the ~~printed board~~printed board~~printed circuit board~~. The ~~confined~~trapped air is reduced in volume by ~~cooling~~being cooled. The amount of the ~~confined~~trapped air is substantively reduced as described above, thereby solving such problems ~~such~~ that the ~~confined~~trapped air expands due to application of heat at the time of thermally bonding the electric component and thus causes occurrence of the void or exposure of the wiring pattern.

~~Brief Description of the Drawings~~BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

Fig. 1A is a cross-sectional view illustrating a process for bounding an anisotropic conductive film according to a conventional method for mounting an electronic component;

Fig. 1B is a cross-sectional view illustrating a process for mounting the electronic component according to a conventional method for mounting the electronic component;

Fig. 1C is a schematic plan view showing an electronic component mounting module according to a conventional method for mounting the electronic component;

Fig. 2A is a schematic plan view illustrating an example of the electronic component mounting module manufactured according to this invention;

Fig. 2B is a schematic cross-sectional view along a line A-A' in Fig. 2A;

Fig. 3A is a schematic cross-sectional view illustrating a process of a method for mounting the electronic component according to this invention in which a flexible board is manufactured;

Fig. 3B is a schematic cross-sectional view illustrating a process of a method for mounting the electronic board according to this invention in which air between the flexible board and the anisotropic conductive film is heated;

Fig. 3C is a schematic cross-sectional view illustrating a process of a method for mounting the electronic component according to this invention in which the anisotropic conductive film is bonded;

Fig. 3D is a schematic cross-sectional view illustrating a process of a method for mounting the electronic component according to this invention in which the flexible board is cooled down;

Fig. 3E is a schematic cross-sectional view illustrating a process of a method for mounting the electronic component according to this invention in which the electronic component is mounted; and

Fig. 4 is a table showing ~~apparent appearance~~ conditions and void rate in ~~alphabetical notations~~ according to evaluation order A to F.

~~Best Mode for Carrying Out the Invention~~

BEST MODE FOR CARRYING OUT THE INVENTION

[0010]

Hereinafter, a method for mounting an electronic component according to this invention is described in reference to drawings. Described first is an electronic component mounting module manufactured according to this invention.

[0011]

The electronic component mounting module manufactured according to this invention is structured according to a so-called COF (Chip on Film) mounting method with which a plurality of wiring patterns 2 on, e.g., a flexible board 1 defined as a ~~printed board~~~~printed board~~~~printed circuit board~~ are ~~joined by a pressurized to be~~ ~~welding method~~ adhered to bumps 4 of an electronic component 3 through an anisotropic conductive film 5 defined as an adhesive sheet so that the electronic component 3 is loaded on the flexible board 1.

[0012]

On the flexible board 1, a solder resist 6 for maintaining electrical insulation performance of the mutual wiring patterns 2 as well as for protecting the wiring

patterns 2 coats the wiring patterns 2 ~~in a manner to expose~~leaving a portion of the wiring patterns 2 to be in contact with the electronic component 3 exposed.

~~Furthermore~~That is, the solder resist 6 has such an opening as surrounding an area to be mounted with the electronic component 3.

[0013]

The anisotropic conductive film 5 ~~is, for example, is a film-like adhesive formed in a film shape,~~ in which conductive particles are dispersed, ~~and maintains an electrical connection between~~through which the electronic component 3 and the flexible board 1 are pressurized and adhered to establish an electrical connection. ~~by welding of those with pressure.~~ The anisotropic conductive film 5 is rendered to have such an outside dimension as overlapping with an inner circumferential edge of the solder resist 6 and to be bonded onto the solder resist 6 in a manner to ~~coat~~cover the area to be mounted with the electronic component 3. It is to be noted that the adhesive sheet is not limited to the above described anisotropic conductive film 5 but may be, for example, a sheet of mere adhesive not containing the conductive particles.

[0014]

Any components used for the electronic component mounting module of this type can be used as those composing the electronic component mounting module such as the above.

[0015]

As the flexible board 1, for example, an insulating substrate made of flexible polyimide can be used. The plurality of wiring patterns 2 on the flexible board 1 are made of, ~~for example,~~ a conductor such as, ~~e.g.,~~ copper or the like, and formed corresponding to the bumps 4 of the electronic component 3. It is to be noted that the ~~printed board~~printed board~~printed circuit board~~ is also not limited to the above described flexible board 1 but may be ~~applicable to a general~~ any type of printed wiring board such as, ~~e.g.,~~ a so-called rigid board or the like.

[0016]

The electronic component 3 is defined as, for example, an IC chip, i.e., an IC chip such as, e.g., a semiconductor bare chip, or the like, and has a surface with the bumps 4 made of gold or the like, serving as ~~a~~terminals.

[0017]

As the adhesive composing the anisotropic conductive film 5, various types of thermosetting resin, thermoplastic resin, rubber, or the like can be used. It is especially desirable to use the thermosetting resin from a view point of reliability after connection. Used as the thermosetting resin is a synthetic resin such as, ~~e.g.,~~ an epoxy resin, a melamine resin, a phenol resin, a diallyl phthalate resin, a bismaleimide triazine resin, a polyester resin, a polyurethane resin, a phenoxy resin, a polyamide resin, a polyimide resin, or the like, or rubber or elastomer containing a functional group such as, ~~e.g.,~~ a hydroxyl group, a carboxyl group, a vinyl group, amino group, an epoxy group, or the like. Especially, the epoxy resin can be desirably used ~~from a viewpoint of each property~~ for its various properties. As the epoxy resin, a bisphenol type epoxy resin or an epoxy novolac resin, or an epoxy compound in which a molecule contains two or more oxirane groups can be used. It is preferable to use the high purity epoxy resin containing an impurity ion, especially a chlorine ion, of less than or equal to 50 ppm.

[0018]

Various conductive particles can be used for the anisotropic conductive film 5, such as a metal powder made of, e.g., nickel, silver, copper, or alloy of ~~these any combination thereof~~, a coated-conductive particle plated with metal, in which a surface of resulting from a spherical resin particle is being coated with conductive material and plated with metal, a conductive particle resulting from such good electrical conductors being coated with an insulating resin film, a particle comprising those electrical conductors and having a surface formed with an insulating resin film, which have been conventionally used for anisotropic conductive adhesive. Such conductive particles preferably have a particle diameters of 0.2 to 20 μm .

[0019]

The anisotropic conductive film 5 composed of constituent materials such as above has melt viscosity preferably in a range between $1.0 \times 10^5 \text{mPa}\cdot\text{s}$ and $1.0 \times 10^7 \text{mPa}\cdot\text{s}$. There is a fear that the anisotropic conductive film 5 cannot ~~have~~ produce sufficient effects where having excessively high if its melt viscosity is excessively high.

[0020]

Furthermore, any solder resists normally used for the electronic component

mounting module of this type, such as, ~~e.g.,~~ insulating resist material or the like can be used as the solder resist 6.

[0021]

Explained next is the electronic component mounting method for manufacturing the electronic component mounting module having the above described structure.

[0022]

For example, a flexible board thoroughly bonded with copper foil is first etched to prepare the flexible board 1 having the plurality of wiring patterns 2 corresponding to the bumps of the electronic component to be mounted. The solder resist 6 is so formed in a manner to surround an area on the flexible board 1, to which the electronic component on the flexible board 1 is mounted, so as to have such an opening as for exposing both one ends of each the wiring patterns 2, to which the bumps 4 of the wiring pattern to be 2 are electrically connected to the bumps 4 of the electronic component 3 and one a portion of an area on the flexible board 1, to on which the electronic component 3 is mounted, and therefore to surround the area to which the electronic component 3 is mounted. The steps explained above is corresponding to Fig. 3A.

[0023]

As indicated by an arrow in Fig. 3B, air on the flexible board 1 is next heated by, for example, heating the flexible board 1. As shown in Fig. 3C, the anisotropic conductive film 5 is subsequently bonded, in a state where the heated air intervenes, to the area on the flexible board to which the electronic component is mounted. At that time, the substantive amount of the ~~confined~~ trapped air can be more reduced as temperature of air is raised higher, however, in a case of using the thermosetting resin as the adhesive for the anisotropic conductive film 5, the temperature of the air is preferably set ~~to less~~ lower than or equal to the reaction temperature of the anisotropic conductive film 5, such as, ~~e.g.,~~ temperature at which the thermosetting resin hardens. To be more precise, the temperature of air is preferably set ~~at more~~ higher than or equal to 60 degrees Celsius and more preferably, in a range between 90 and 159 degrees Celsius defined as the reaction temperature of the anisotropic conductive film 5.

[0024]

Next, the flexible board 1 bonded with the anisotropic conductive film 5 is desirably cooled down once. The volume of air ~~confined-trapped~~ below the anisotropic conductive film 5 is, as shown in Fig. 3D, reduced by cooling down the flexible board 1, thereby suppressing occurrence of the voids more certainly.

[0025]

The electronic component 3 is arranged ~~at a prescribed position in place so such~~ that a surface of the electronic component 3 on which the bumps 4 are formed faces the anisotropic conductive film 5, and the arranged electronic component 3 is ~~thermally-bonded with application of~~ while heating. Therefore, the bumps 4 of the electronic component 3 are electronically connected to the wiring patterns 2 through the conductive particles in the anisotropic conductive film 5, thereby completing the electronic component mounting module as shown in Fig. 3.

[0026]

In the process of bonding the anisotropic conductive film 5 to the flexible board 1, the air is inevitably ~~confined-trapped among in each of~~ concavities and convexities ~~ascribable due~~ to the flexible board 1 in a concavo-convex form, however, according to this invention, the air intervening between the anisotropic conductive film 5 and the flexible board 1 is heated to keep the ~~confined-trapped~~ air expanded. That is, the substantive amount of air ~~confined-trapped~~ between the anisotropic conductive film 5 and the flexible board 1 is previously reduced. Therefore, ~~production-occurrence~~ of the voids, destruction of the anisotropic conductive film 5, or the like due to the ~~confined-trapped~~ air expansion is suppressed even where the air is heated again in the process of thermally bonding the electronic component. Consequently, according to this invention, the electronic component mounting module having reliability can be manufactured, while avoiding drawbacks with which problems are avoided, such as, ~~e.g.,~~ occurrence of voids, exposure of the wiring, or the like ~~ascribable to the confined~~ associated with the trapped air. Furthermore, the electronic component mounting module having extremely high reliability can be manufactured without a process for forming ventilation holes ~~on in~~ the flexible board 1.

Embodiments

[0027]

Specific embodiments with application of this invention are explained based on

experimental results.

<First Embodiment>

[0028]

In this embodiment, the electronic component mounting module was manufactured using the anisotropic conductive films respectively having relatively low flowability (ACF-1: high viscosity), medium flowability (ACF-2: medium viscosity), and high flowability (ACF: low viscosity).

[0029]

The flexible board provided with the wiring patterns was first prepared and formed with the solder resist in a manner to surround the area to be mounted with the IC chip.

[0030]

The anisotropic conductive film was next heated to raise the temperature of the air on it up to 40 degree Celsius, and then the anisotropic conductive film is adhered onto the flexible board so as to cover the opening of the solder resist.

~~bonded so as to coat the opening of the solder resist in a state where the air on the flexible board was heated up to 40 degrees Celsius by heating up the flexible board.~~

Used as the anisotropic conductive film herein was the ACF-1 having a melt viscosity (at 100 degrees Celsius) of $2.5 \times 10^7 \text{ mPa}\cdot\text{s}$, according to measurement in using a Haake RS150 rheometer manufactured by HAKKE Co., Ltd. The one or more IC chips were next aligned at a prescribed position in place on the anisotropic conductive film and subsequently heated and pressed to be mounted on the flexible board, thereby obtaining the electronic component mounting module.

[0031]

Furthermore, the electronic component mounting module was manufactured in the same manner except that used as the anisotropic conductive film herein was the ACF-2 having a melt viscosity (at 100 degrees Celsius) of $1.1 \times 10^7 \text{ mPa}\cdot\text{s}$, according to measurement in using the Haake RS150 rheometer manufactured by HAKKE Co., Ltd.

[0032]

Furthermore, the electronic component mounting module was manufactured in the same manner except that used as the anisotropic conductive film herein was the

ACF-3 having a melt viscosity (at 100 degrees Celsius) of $4.0 \times 10^6 \text{ mPa}\cdot\text{s}$, according to measurement in using the Haake RS150 rheometer manufactured by HAKKE Co., Ltd.
<Second Embodiment>

[0033]

The electronic component mounting module was manufactured using above described three kinds of ~~the~~ anisotropic conductive films in the same manner as in First Embodiment, except that the anisotropic conductive film was bonded so as to ~~coat~~ cover the opening of the solder resist ~~in a state where~~ while the air on the flexible board was heated up to 60 degrees Celsius.

<Third Embodiment>

[0034]

The electronic component mounting module was manufactured using above described three kinds of ~~the~~ anisotropic conductive films in the same manner as in First Embodiment, except that the anisotropic conductive film was bonded so as to ~~coat~~ cover the opening of the solder resist ~~in a state where~~ while the air on the flexible board was heated up to 80 degrees Celsius.

<Fourth Embodiment>

[0035]

The electronic component mounting module was manufactured using above described three kinds of ~~the~~ anisotropic conductive films in the same manner as in First Embodiment, except that the anisotropic conductive film was bonded so as to ~~coat~~ cover the opening of the solder resist ~~in a state where~~ while the air on the flexible board was heated up to 120 degrees Celsius.

<Comparative Example >

[0036]

In a Comparative Example, the electronic component mounting module was manufactured using the anisotropic conductive films of the same kinds as those in each above embodiment, in the same manner as in the above described embodiments except that the air was not heated through the flexible board in a process for bonding the anisotropic conductive film. It is to be noted that in the Comparative Example, the air between the flexible board and the anisotropic conductive film was at 25 degrees Celsius equal to room temperature.

[0037]

In regarding each of the thus manufactured electronic components, the area mounted with the IC chip was observed from a side of the flexible board to evaluate an generation status occurrence condition of the voids. Evaluation results are described in Table 1. It is to be noted that a variation basis for each of alphabetical notifications A to F in Table 1 follow the evaluation standard is as shown in Fig. 4. That is, ~~alphabetical notification~~ A indicates a case of a void rate of less than or equal to 5 percent; ~~alphabetical notification~~ B indicates a case of a void rate of about 10 percent; ~~alphabetical notification~~ C indicates a case of a void rate of about 20 percent; ~~alphabetical notification~~ D indicates a case of a void rate of about 40 percent; ~~alphabetical notification~~ E indicates a case of a void rate of about 60 percent; and ~~alphabetical notification~~ F indicates a case of a void rate of more than or equal to 5-80 percent.

Table 1

Item	Comparative Example	First Embodiment	Second Embodiment	Third Embodiment	Fourth Embodiment
Heating Temperature	25degrees C.	40degrees C.	60degrees C.	80degrees C.	120degrees C.
ACF-1	F	F	E	D	B
SCF ACF-2	E	E	D	C	B
ACF-3	C	B	A	A	A

[0038]

As is obvious from Table 1, improvement was observed in occurrence of the voids in each of Embodiments in which the air was heated during a process for bonding the anisotropic conductive film, compared to the Comparative Example in which the air was not heated. Especially in Second to Fourth Embodiments in which the air heating temperature is at more higher than or equal to 60 degrees Celsius, the void rate of less than or equal to 5 percent was achieved in a case of using the anisotropic conductive film ACF-3 and such improvement was obviously observed in using the other anisotropic conductive films ACF-1, ACF-2.

[0039]

It became clear from the above results that the amount of air ~~confined~~ trapped between the anisotropic conductive film and the flexible board is decreased upon

heating the air in a process for bonding the anisotropic conductive film, thereby being able to suppress the voids from occurring.

[0040]

As described above in detail, according to ~~a~~the method for mounting the electronic component in this invention, since the amount of air ~~confined-trapped~~ between the adhesive sheet and the ~~printed-board~~printed-board~~printed-board~~printed circuit board can be substantially decreased by heating the air in a process ~~for~~of bonding the adhesive sheet, the electronic component mounting module having high reliability can be manufactured, with which occurrence of voids, exposure of the wiring pattern, or the like is avoided.

Specific embodiments of a method for mounting electronic component according to the present invention have been described for the purpose of illustrating the manner in which the invention may be made and used. It should be understood that implementation of other variations and modifications of the invention and its various aspects will be apparent to those skilled in the art, and that the invention is not limited by the specific embodiments described. It is therefore contemplated to cover by the present invention any and all modifications, variations, or equivalents that fall within the true spirit and scope of the basic underlying principles disclosed and claimed herein.

Claims

What is Claimed is:

1. A method for mounting through an adhesive sheet an electronic component on a printed board provided with a wiring pattern comprising the steps of:
heating air intervening between the adhesive sheet and the printed board; and
bonding the adhesive sheet to an area of the printed board to be mounted with the electronic component in the above state.
2. The method for mounting the electronic component according to claim 1, wherein the air intervening between the adhesive sheet and the printed board is heated upon heating the printed board.
3. The method for mounting the electronic component according to claim 2, wherein the electronic component is thermally bonded on the adhesive sheet after the printed board bonded with the adhesive sheet is cooled down.
4. The method for mounting the electronic component according to claim 1, wherein the heating temperature is set to not less than 60 degrees Celsius nor more than reaction temperature of the adhesive sheet.
5. The method for mounting the electronic component according any one of claim 1, claim 2, claim 3, and claim 4, wherein the adhesive sheet is defined as an anisotropic conductive film.
6. The method for mounting the electronic component according to any one of claim 1, claim 2, claim 3, and claim 4, wherein the printed board is defined as a flexible board.

Abstract

A method for mounting through an anisotropic conductive film 5—defined as an adhesive sheet an electronic component 3—on a printed circuit board (flexible board 4) provided with a wiring pattern 2. The anisotropic conductive film 5—is bonded to an area of the flexible board 4—to be mounted with the electronic component 3—in a state where air intervening between the anisotropic conductive film 5—and the flexible board 4—is heated. Since the air confined between the anisotropic conductive film and the flexible board reduces in volume upon cooled down, occurrence of voids, exposure of the wiring pattern, or the like is avoided. Consequently, reliability can be enhanced without complicating the mounting.

FIG. 1A




FIG. 1B




FIG. 1C

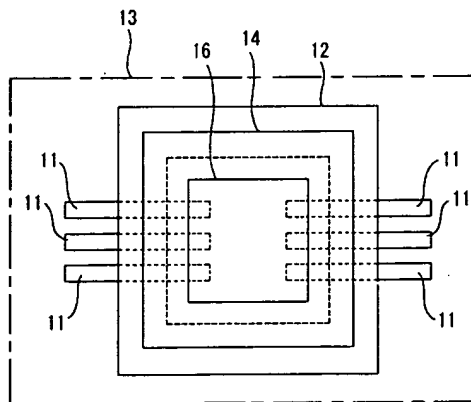


FIG. 2A

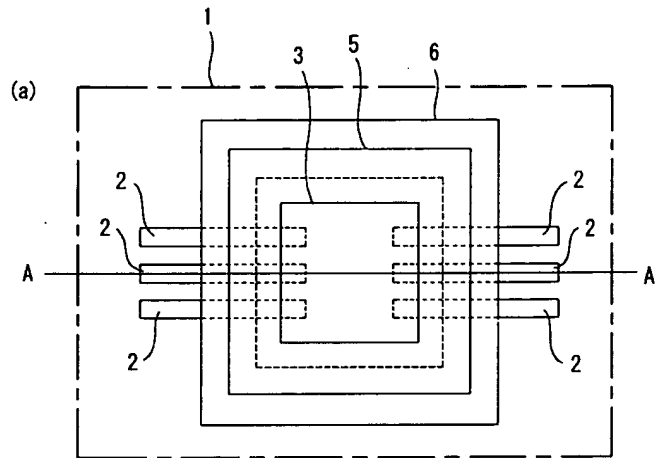


FIG. 2B

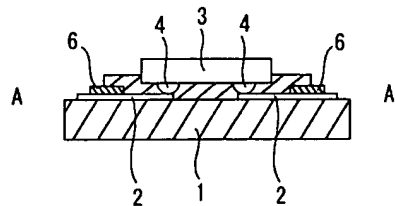


FIG. 3A




FIG. 3B




FIG. 3C




FIG. 3D




FIG. 3E










FIG. 4

表記 外觀状態	A		5%以下
	B		10%程度
	C		20%程度
	D		40%程度
	E		60%程度
	F		80%以上
			ポイド割合